



Somos® WaterClear Ultra 10122

An optically clear stereolithography material tailored for colorless, functional parts with excellent temperature resistance

Product Description

Somos® WaterClear Ultra 10122 is an optically clear stereolithography material that is easy to use and fast to build. This material produces colorless, functional and accurate parts that simulate an acrylic appearance. Parts produced with Somos® WaterClear Ultra 10122 exhibit excellent temperature resistance.

Somos® WaterClear Ultra 10122 is ideal for applications such as master patterns, concept and functional models. This material also provides refractive values similar to engineered plastics for functional testing in optical light transmission work.

Key Benefits

- Extraordinary optical clarity
- Superior moisture resistance
- Easy to use and finish

Ideal Applications

- Automotive lenses
- Bottles
- Lenses
- Light pipes

Somos® WaterClear Ultra 10122 Technical Data

Liquid Properties		Optical Properties		
Appearance	Optically clear, colorless	E_c	10.0 mJ/cm ²	[critical exposure]
Viscosity	~165 cps @ 30°C	D_p	6.5 mils	[slope of cure-depth vs. ln (E) curve]
Density	~1.13 g/cm ³ @ 25°C	E_{10}	47 mJ/cm ²	[exposure that gives 0.254 mm (.010 inch) thickness]
		D542	1.52	Index of Refraction (cured)

Mechanical Properties		UV Postcure	
ASTM Method	Property Description	Metric	Imperial
D638M	Tensile Strength at Break	56 MPa	8.1 ksi
D638M	Tensile Modulus	2,880 MPa	418 ksi
D638M	Elongation at Break	7.5%	
D638M	Elongation at Yield	4%	
D638M	Poisson's Ratio	0.41	
D790M	Flexural Strength	84 MPa	12.2 ksi
D2240	Flexural Modulus	2,490 MPa	361 ksi
D256A	Izod Impact (Notched)	25 J/m	0.47 ft-lb/in
D2240	Hardness (Shore D)	87	
D570-98	Water Absorption	1.1%	
Thermal/Electrical Properties		UV Postcure	
ASTM Method	Property Description	Metric	Imperial
E831-05	C.T.E. -40 - 0°C (-40 - 32°F)	65 $\mu\text{m}/\text{m}^\circ\text{C}$	36 $\mu\text{in}/\text{in}^\circ\text{F}$
E831-05	C.T.E. 0 - 50°C (32 - 122°F)	90 $\mu\text{m}/\text{m}^\circ\text{C}$	50 $\mu\text{in}/\text{in}^\circ\text{F}$
E831-05	C.T.E. 50 - 100°C (122 - 212°F)	168 $\mu\text{m}/\text{m}^\circ\text{C}$	93 $\mu\text{in}/\text{in}^\circ\text{F}$
E831-05	C.T.E. 100 - 150°C (212 - 302°F)	159 $\mu\text{m}/\text{m}^\circ\text{C}$	88 $\mu\text{in}/\text{in}^\circ\text{F}$
D150-98	Dielectric Constant 60 Hz	3.1	
D150-98	Dielectric Constant 1 KHz	3.5	
D150-98	Dielectric Constant 1 MHz	3.1	
D149-97a	Dielectric Strength	15.0 kV/mm	381 V/mil
E1545-00	Tg	44°C	111°F
D648	HDT @ 0.46 MPa (66 psi)	47°C	117°F
D648	HDT @ 1.81 MPa (264 psi)	43°C	109°F
D648	Thermal Postcure: HDT @ 0.46 MPa (66 psi)	60°C	140°F
D648	Thermal Postcure: HDT @ 1.81 MPa (264 psi)	50°C	122°F

These values may vary and depend on individual machine processing and post-curing practices.

DSM Functional Materials Somos® Material Group

North America

1122 St. Charles Street
Elgin, Illinois 60120
USA
Phone: +1.847.697.0400

Europe

Slachthuisweg 30
3151 XN Hoek van Holland
The Netherlands
Phone: +31.174.315.391


China

476 Li Bing Road
Zhangjiang Hi-Tech Park
Pudong New Area
Shanghai 201203, China
Phone: +86.21.6141.8064

Visit us online at www.dsm.com/somos

NOTICE : Somos® is a registered trademark of Royal DSM N.V. Somos® is an unincorporated subsidiary of DSM Desotech Inc. The information presented herein is based on generally accepted analytical and testing practices and is believed to be accurate. However, DSM Desotech expressly disclaims any product warranties which may be implied including warranties of merchantability and/or fitness for a particular purpose. DSM Desotech's products are sold subject to DSM Desotech's standard terms and conditions of sale, copies of which are available upon request. Purchasers are responsible for determining the suitability of the product for its intended use and the appropriate manner of utilizing the product in purchaser's production processes and applications so as to insure safety, quality and effectiveness. Purchasers are further responsible for obtaining necessary patent rights to practice any invention in connection with the use of purchased product and any other product or process. DSM Desotech reserves the right to change specifications of their products without notice. © 2015 DSM IP ASSESTS B.V. All rights reserved.

05+2015 | SOMOS-WATERCLEAR-SS-PDS44

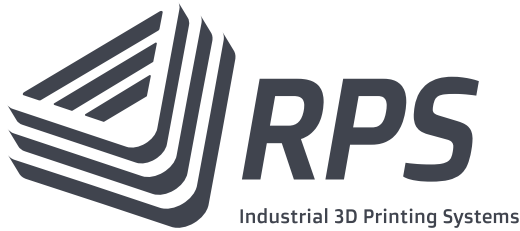

About RPS

RPS has been in operation over ten years and our engineers collectively have decades of experience working with stereolithography and laser sintering equipment. With proven experience in 3D printing, engineering, electronics, computer-aided engineering and more, we understand the technology and can offer advice on how it can suit your specific application.

We manufacture the **NEO800** stereolithography system, designed, developed and built by RPS engineers. We are also an HP Channel Partner of HP's Multi-Jet Fusion technology and offer a range of materials and software through our partnership with market-leading suppliers ALM, DSM Somos® and Materialise.

    +44 (0) 1296 425665 | support@rps.ltd | www.rps.ltd

14 Bridgegate Business Park | Gatehouse Way | Aylesbury | Buckinghamshire | HP19 8XN | UK